Kytola INSTRUMENTS

FLOW METER

Model **TTFH**

Variable area flow meter model TTFH is designed for measuring and monitoring of large water flows.

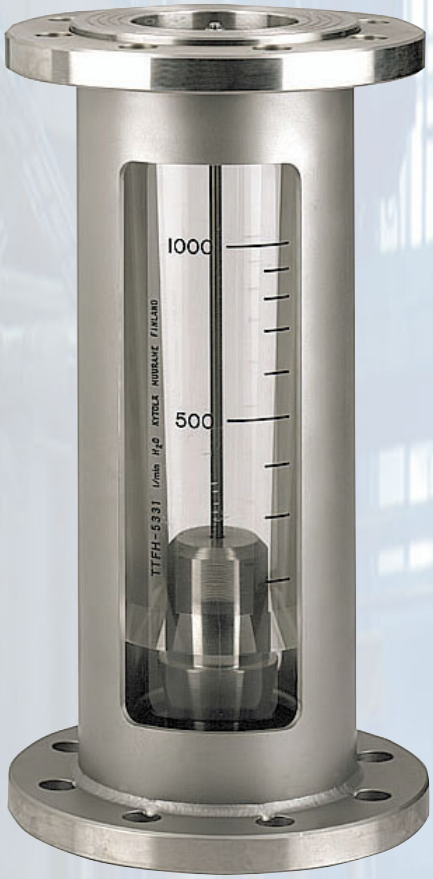

Model TTFH

FEATURES

- Sturdy construction
- Flanged connections

TYPICAL APPLICATIONS

- Water treatments plants
- Power plants

OPTIONS

- Low flow alarm
- Viton® or EPDM seals

ISO 9001
DNV
CERTIFICATED FIRM

Technical data TTFH

TTFH

Model	TTFH -
Connections	DN 80
Max. pressure	16 bar
Max. temperature	75 °C
Weight	17,5 kg
Body	AISI 316
Float	AISI 329
Flowtube	Acrylic
Seals	Nitrile (*Viton®, EPDM)
Accuracy	± 5 % F.S.

*) Special construction on request

TT □ - □ - □

Special feature	
V	Viton® -seals
Scale	
A	H_2O (l/min) at +20°C
Flow range	
4A	75 - 600 l/min
4B	100 - 1000 l/min
Connections	
FH	DN 80 flanges

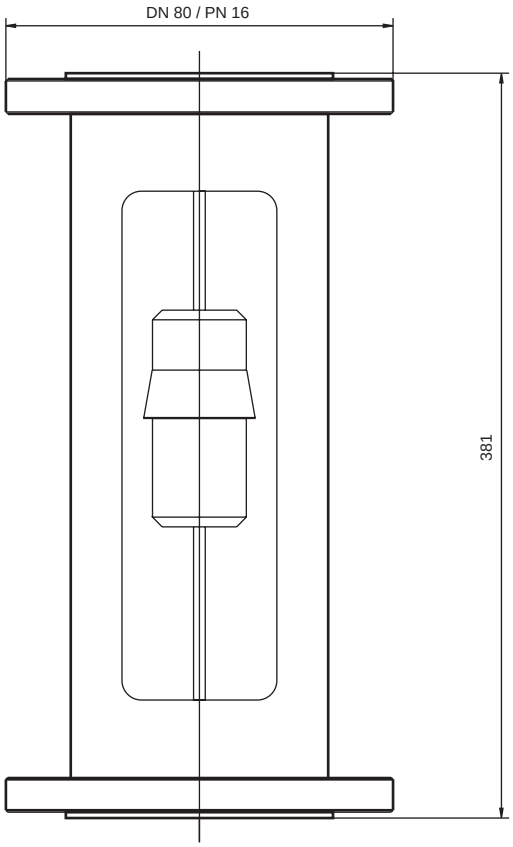

MANUFACTURER

Kytola INSTRUMENTS

KYTOLA OY • Olli Kytolan tie 1
P.O. Box 5 • FI-40951 MUURAME • FINLAND
Phone +358 14 339 0600 • Fax +358 14 631 419
E-mail sales@kytola.com • www.kytola.com

LOCAL REPRESENTATIVE